


SWEP SXB85

SWEP Sealix®¹ is a new BPHE range that feature a protective layer on all inner surfaces of the BPHE, resulting in enhanced behavior in terms of metal leaching, scaling and corrosion while maintaining thermal and hydraulic performance. The SXB85 combines Sealix® features with a high thermal performance in a compact geometry which offers an increased life-time solution for high-capacity water applications. All parts in contact with water are covered by the SiO₂-based layer.

¹ Sealix is a registered trademark in the EU




Maximum number of plates (NoP)	160
Max flow	17 m ³ /h (74.85 gpm)
Channel volume	0.094/0.094 dm ³ (0.0033/0.0033 ft ³)
Material	316/316L stainless steel plates, copper brazing
Weight excl. connections	2.09+(0.1367*NoP) kg 4.60+(0.301*NoP) lb
Max Particle Size (mm)	0.8

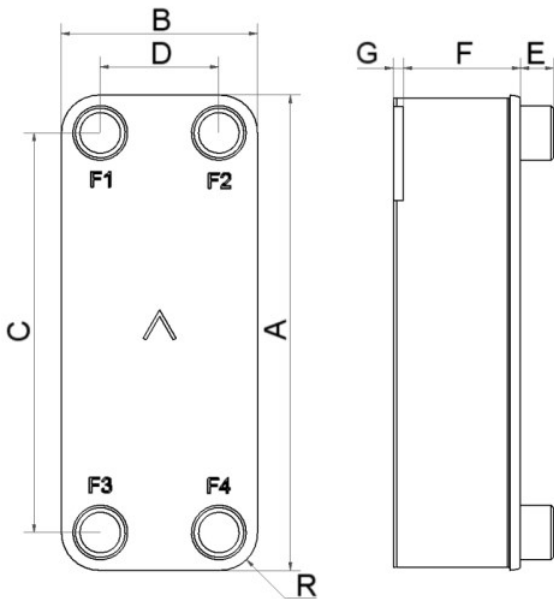

#	MM	IN
A	526	20.71
B	119	4.69
C	470	18.5
D	63	2.48
F	4,00+1,84*(NoP)	0.16+0.07 *(NoP)
G	6	0.24
R	23	0.91
E_1	27	1.06
E_2	45	1.77
E_3	20	0.79



Threaded Connection

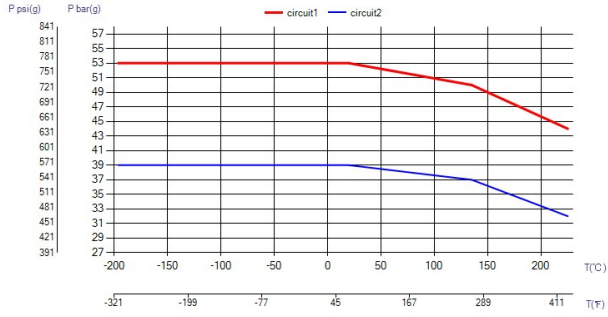

UL Tryck/Temperatur

